



Speed gate DSF640 with folding wings (Flap) in a modern slim design is suitable for places with the highest traffic intensity and at the same time with high aesthetic demands.

Technical specifications



Model:	DSF640
Dimensions:	1380 x 270 x 1000 mm
Cabinet material:	stainless steel 1,5mm
Wings:	akrylic/glass
Instalation:	indoor
Lane width:	600 mm
Capacity:	40 pers./min.
Power:	230 V AC, 50Hz, 30W
Operating voltage:	24 V DC
Open/close time:	0,8 - 1,2 s
Weight:	65 kg

- Single passage with two single-sided modules
- 2 passages with two single-sided modules and one central module

Description

- Stainless brushed steel 1,5 mm thickness and tempered glass wings with colored backlight.
- 10 optical sensors for detection and security.
- Reliable mechanical locking in extreme positions.
- Output for a superior access system confirming the passage of a person.
- Adjustable barrier speed from 0.8 sec.
- LED guidance pictograms on the front of the cabinet.
- Possibility of integrating readers into the turnstile cabinet.
- Memory for the next 10 passes to ensure smooth operation.
- Automatic opening in case of power failure

Dimensions:

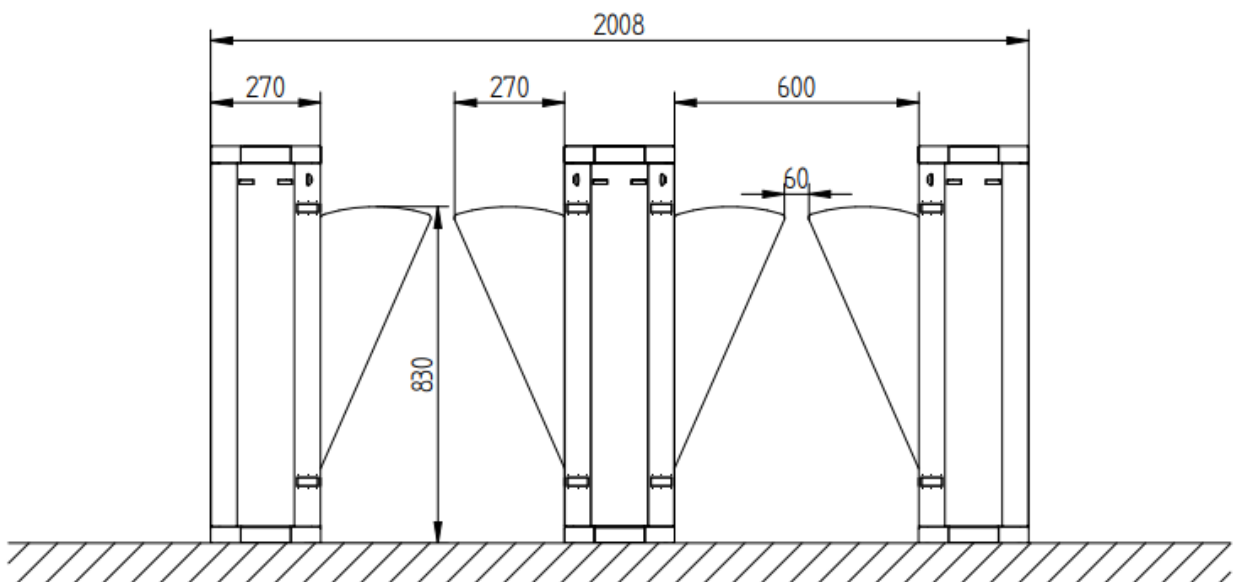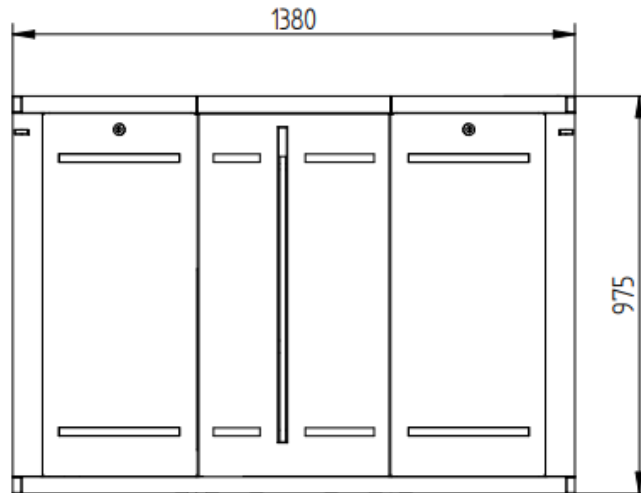

Parameters and design subject to change without prior notice

ASParking
ACCESS CONTROL

závory a turnikety
parkovací systémy
vstupenkové systémy
www.asparking.cz

AS Parking s.r.o.
Masarykova 118
CZ - 664 42 Modřice

asparking@asparking.cz
T: +420 515 536 385
F: +420 515 536 391

IČ: 25532961, DIČ: CZ25532961
Bankovní spojení: Název banky
č. ú.: 1234567/0100